

Cutting Tool Measurement System

Effective Cutting Diameter Measurement

Simple, fast, and accurate measurement of critical cutting tool dimensions


Beta LaserMike's Cutting Tool Measurement System (CTMS) is an easy-to-use non-contact system for measuring effective cutting diameter of fluted cutting tools such as end mills, drill bits, step tools, reamers, and router bits.

By measuring the dimensional characteristics of a cutting tool before it cuts your part, you eliminate scrap that results from an oversized tool and rework that results from an undersized tool. In addition, by identifying and eliminating tool run-out, tool lifetimes can be significantly improved. This is especially important for PCD tools, where even a small amount of run-out can dramatically shorten tool life.

Zero Error Fixturing

The CTMS utilizes a unique rotary drive and "zero-error" carbide V-blocks, along with the proven measurement accuracy of a Z-Mike laser micrometer to eliminate errors caused by typical gage mechanics. The CTMS is capable of diameter and TIR measurements with an accuracy of ± 0.00003 in. (± 0.0008 mm).

A motorized rotary drive system allows the system to automatically measure effective cutting diameter, regardless of the number of flutes. An adjustable slide allows the tool to be positioned anywhere along the length and displayed on-screen with a 0.0005 in. (0.0127 mm) resolution.

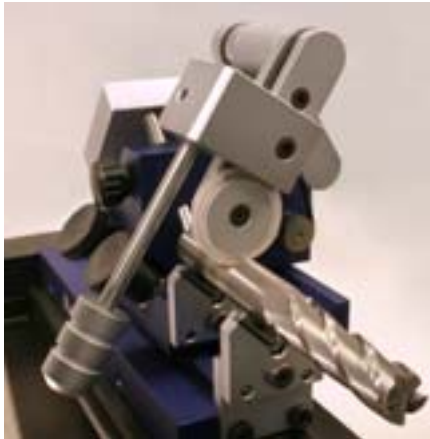

The CTMS Advantage

- Accuracies up to 10 times greater than mechanical dial indicators
- Non-contact laser ensures that tool is not damaged during measurement
- Repeatable measurement of tool geometry free from operator influence
- Accommodates a wide range of tool sizes and types
- No mastering or field calibration required
- Graphical touch-screen interface provides ultra-simple operation
- No tool centering required

Measurement Capabilities

- Shank Diameter
- Shank TIR
- Effective Cutting Diameter
- Taper or Back Taper Angle


Visit our website at:
www.betalasermike.com

Z-Mike[™]
by BETA LaserMike


Easy to use

Measurements are performed quickly and easily. Just place the tool in the fixture, adjust the linear position and rotational speed, and hit the GO button. In seconds, the system computes the measurements and displays the results on screen. You can even send the data to a data logger or PC automatically. The fixture can be quickly adjusted to accommodate a wide range of shank lengths and diameters, and an adjustable end-stop ensures consistent tool placement and position during measurement.


Data display



Magnified display



Pop-up menus



Library (part) selection

Measurement Specifications

Measurement Range*	
Shank Diameter	0.04 – 1.0 in. (1.0 – 25.4 mm)
Cutter Diameter	0.01 – 1.26 in. (0.25 – 32.0 mm)
Shank Length	1.1 – 4.0 in. (28.0 – 100 mm)
Overall Length	1.1 – 10.0 in. (28.0 – 254 mm)
Measurement Accuracy	
Display Resolution	0.000001 in. (0.01 μm)
Diameter Measurement	±0.000030 in. (±0.76 μm)
Effective Cutting Diameter	±0.000060 in. (±1.5 μm)
Linear Position	±0.0005 in. (±12.7 μm)

*All tools should be evaluated by a Z-Mike representative before ordering

Output Specifications

Serial Port	RS-232C, 9-Pin Female D-connector, User selectable baud rate
-------------	---

General Specifications

Operating Temperature	7° to 36° C (45° to 97° F) at < 90% relative humidity
Storage Temperature	-20° to 60° C (-4° to 140° F)
Dimensions (H x W x D) (including fixture)	254 x 635 x 559 mm (10 x 25 x 22 in.)
Weight (including fixture)	18 kg (40 lb.)
Laser Source	HeNe gas laser; <1 mW output
Display	320 x 240 liquid crystal display; 256 colors
Power Requirements	100-240 volts AC (+5% to -10%), 50/60 Hz (+/-2 Hz) 100 watts total

Z-Mike™

by BETA LaserMike

Beta LaserMike USA
8001 Technology Blvd.
Dayton, OH 45424 USA
Ph: +1 937 233 9935
Fax: +1 937 233 7284

Beta LaserMike Asia
Unit 401, Xinmao Plaza
Building 9, No. 99 TianZhou Rd.
Shanghai, 200233, China
Ph: +86 21 6113 3688
Fax: +86 21 6113 3616

**Z-Mike
Lasermesstechnik GmbH**
Steinschönauerstrasse 4c
D-64823 Gross-Umstadt
Germany
Tel: +49 (0)6078 9357 0
Fax: +49 (0)6078 9357 49



**ISO 9001
Certified**

Visit our website at: www.betalasermike.com